




**55" LCD MONITOR**  
**LDT551V**

- ALUMINUM, EYE-CATCHING BEZEL DESIGN
- ADVANCED HIGH-DEFINITION DIGITAL SIGNAGE DISPLAY
- FULL 1920 X 1080 NATIVE RESOLUTION
- OPTIONAL CAT5 TRANSMITTER AND RECEIVER
- RJ45 PORT FOR NETWORKED CONTROL
- FRONT AND REAR AMBIENT LIGHT SENSORS
- CLOSED CAPTION SUPPORT

LEADING THE EVOLUTION OF  
**HIGH-DEFINITION**  
DIGITAL SIGNAGE


# 55" LCD MONITOR

# LDT551V

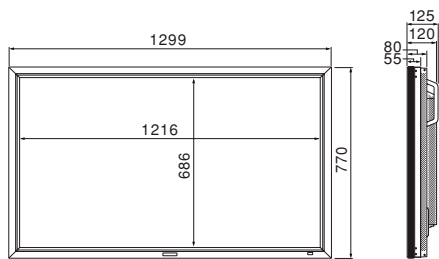


Unit: mm

## MULTIPLE STANDARD INPUT AND OUTPUT CONNECTORS

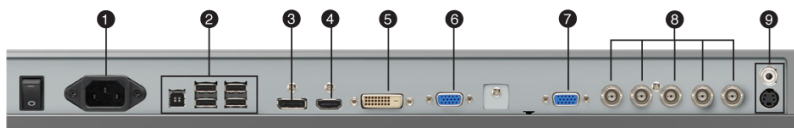

- 1 Power in (3-pin, with earth terminal)
- 2 USB hub
- 3 RGB 6 in (DisplayPort)
- 4 RGB 1 in (HDMI)
- 5 RGB 2 in (DVI-D)
- 6 RGB 3 in (mini D-sub 15-pin)
- 7 RGB out (mini D-sub 15-pin)
- 8 RGB 4 in DVD/HD in (BNC)
- 9 Video I/O (BNC/S, RCA connectors)
- 10 External speaker terminals
- 11 Audio out (RCA)
- 12 Audio in 1, 2, 3
- 13 RS-232C (D-sub 9-pin)
- 14 LAN connector
- 15 Option slot



Optional CAT5 Transmitter Box: DP-2CA5-T

Optional CAT5 Receiver Box: DP-2CA5-R

<b>CLASS</b>	55" (Diagonal) LCD Monitor
<b>VIEWABLE IMAGE SIZE</b>	47.6" x 26.8"
<b>ORIENTATION</b>	Landscape / Portrait
<b>BRIGHTNESS</b>	500 cd/m <sup>2</sup>
<b>PIXEL PITCH</b>	0.630mm
<b>CONTRAST RATIO</b>	5000:1
<b>DIMENSIONS (W x H x D in.)</b>	51.1" x 30.3" x 4.9"
<b>WEIGHT (WITHOUT SPEAKERS)</b>	88 lbs
<b>BEZEL WIDTH</b>	1.6"
<b>RESPONSE TIME</b>	8 ms (gray to gray)
<b>VIEWING ANGLE</b>	Horizontal and vertical: 178°
<b>VIDEO/AUDIO INPUTS AND OUTPUTS</b>	mini D-Sub 15 pin In/Out, HDMI, DVI-D, DisplayPort, CAT5 In/Out (optional), 5 BNC (Component) In, S-Video, Composite (BNC In/Out), 2 x Audio L/R (RCA), Audio Stereo mini jack, RS-232C, LAN, 5 x USB (1 upstream/4 downstream)
<b>SPEAKER OUTPUT</b>	External speaker jack
<b>CONTROL INPUT/OUTPUT</b>	RS232C (D-Sub 9 In/Out), LAN
<b>POWER CONSUMPTION (WITHOUT SPEAKERS)</b>	322 W
<b>ESTIMATED BACKLIGHT LIFE</b>	Up to 50,000 hours*
<b>AUDIO SPEAKER</b>	Built-in 10W speakers
<b>TABLE STAND</b>	Optional: ST-461V
<b>WALL MOUNT COMPATIBILITY</b>	8-M8 Screws holes (200mm (7.9") pitches) for monitor mount
<b>WARRANTY</b>	3-years parts and labor, Express Replacement Assistance, toll-free 24x7 technical support

\*Results may vary depending on usage and operating environment.

Specifications subject to change without notice.