


NEC MultiSync® X461UN

46" ultra-narrow, professional-grade LCD display ideal for video wall applications

Revolutionize your video walls. The ultra-narrow bezel of the 46" NEC MultiSync X461UN allows for a screen-to-screen distance between two neighboring displays of a mere 7.3mm, a near 450% improvement over NEC's previous generation large-screen displays. Ideal for digital signage and broadcast applications, the display can be deployed in video wall matrices of up to 10x10 (100 displays), creating a total surface area of approximately 645 sq ft. The barely discernable transition gap between displays ensures a homogenous picture across the matrix.

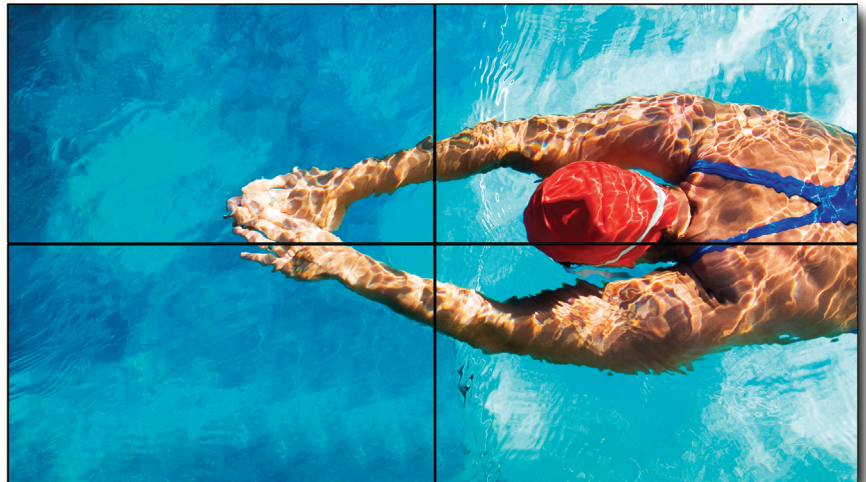

- ❑ **Professional-grade LCD panel and components** meet even the most formidable digital signage industry requirements
- ❑ **1360 x 768 WXGA native resolution** in true 16:9 aspect ratio, maximum brightness of 700 cd/m² and typical contrast ratio of 3000:1
- ❑ **Ground-breaking ultra-narrow bezel** of 7.3mm (screen-to-screen) creates a nearly seamless video wall
- ❑ **TileMatrix™ technology** enables video walls (up to 100 displays in a 10x10 matrix)
- ❑ **Built-in expansion slot** allows for seamless integration of current and future NEC accessories and third-party components
- ❑ **Optional color calibration solution** ensures color uniformity and fidelity across individual and multiple screens, creating a perfectly matched image in tiled environments
- ❑ **Ethernet Control and Communication** provides the highest level of remote display management and includes such features as automatic email notification for diagnostic purposes
- ❑ **Carbon footprint meter** informs and motivates responsible use of the display by calculating and tracking carbon savings
- ❑ **Rapid Response™ technology** delivers virtually uninterrupted, undistorted viewing of high-speed, full-motion video
- ❑ **Diverse input connectors** allows for maximum compatibility and flexibility during product implementation
- ❑ **Optional wall mount and bezel kit** simplifies your installation and enhances the aesthetics of your video wall



Specifications for X461UN

Model	X461UN
LCD MODULE	
Viewable Size (Diagonal)	46"
Panel Technology	SPVA
Native Resolution	1360 x 768
Pixel Pitch	0.746mm
Brightness (typical)	500 cd/m ² (700 cd/m ² max.)
Contrast Ratio (typical)	3000:1
Active Screen Area (W X H)	40.1 x 22.5 in. (1018.4 x 572.5mm)
CONNECTIVITY	
Input Terminals	
RGB1 (Digital)	DVI-D
RGB2 (Analog)	Analog D-sub
RGB3 (Analog)	Analog BNC (RGBHV)
Video 1	Composite (Shared RCA and BNC)
Video 2	S-Video
Video 3	HDMI
Component Video 1 (DVD/HD)	Component BNC
Audio	4: RCA (L/R) x 2: Stereo MiniJack; HDMI
External Control	LAN RJ-45, RS-232, DDC/CI
Output Terminals	
RGB	Loop-out RGB3
Video	Loop-out BNC (Composite/Component) - Video1, Component
Audio	Loop-out Stereo RCA
External Control	RS-232 out for multiple monitor control, RJ-45, DDC/CI
FEATURES	
Additional Features	Ultra-narrow bezel, Ethernet monitor and control, commercial-grade sealed panel, advanced cooling system for 24/7 operation, expansion slot, programmable lookup tables, Plug and Play (DDC/CI, DDC2B), PIP (remote), POP, 6-axis color adjustment, multi-level programmable zoom, TileMatrix (up to 10x10), TileComp, video ready, scheduler (w/ RTC), sharpness/softness, off-timer (countdown), screen saver, vacation switch, 10-bit gamma, AutoBright (signal input), Windows Vista Premium-certified, portrait-capable; Kensington lock; closed captioning, serial number display,
POWER	
Power Requirements	AC 100-240V @ 50/60Hz
Power Consumption (typical)	200W (330W max.)
Power Consumption - ECO Standby	< 1W
PHYSICAL SPECIFICATIONS	
Bezel Width (R/B, T/L)	0.12 in. / 2.7mm, 0.18 in. / 4.5mm
Dimensions (without stand; WxHxD)	40.4 x 22.8 x 5 in. / 1025.7 x 579.8 x 128.1mm
Packaging Dimensions (WxHxD)	56.4 x 38.1 x 18.3 in. / 1433 x 968 x 464mm
Net Weight (without stand)	64.6 lbs. / 29.3 kg
Gross Weight (without pallet)	95.9 lbs. / 43.5 kg
VESA Hole Configuration	300 x 300mm (4 hole)
ENVIRONMENTAL CONDITIONS	
Operating Temperature	5° - 40°C / 41° - 104°F
Operating Humidity	20 - 80%
ACCESSORIES	
Included	AC power cord, setup sheet, 15-pin D-sub video cable, CD-ROM
Optional	Remote/Ambient Control Kit (KT-RC), Over-Frame Kit (KT-46UN-OF), Display Wall Calibrator Kit (KT-46UN-CC), Wall mount (landscape - WM-46UN-L; portrait - WM-46UN-P), DVI Daisy Chain Expansion Board (SB-L008WU), HD-SDI Expansion Board (SB-L007KK), Single Board Computer (MPD-SBC-8/-16-2), stand (ST-4620), Digital Signage Kit (DSK3260)
WARRANTY/SERVICE	
On-Site Limited Warranty	3 years parts and labor, including backlight

Image Gap Comparison

NEC MultiSync LCD4615



90mm

NEC MultiSync LCD4620



33mm

NEC MultiSync X461UN



7.3mm

The X461UN's ultra-narrow bezel allows for a screen-to-screen distance between two neighboring displays of only 7.3mm, a more than 1200% improvement over the standard bezel width from NEC's 90mm MultiSync 15 Series and close to 450% compared to its previously revolutionary 33mm MultiSync 20 Series displays.

MultiSync is a registered trademark, and Rapid Response and TileMatrix are trademarks of NEC Display Solutions. All other brand or product names are trademarks or registered trademarks of their respective holders. Product specifications subject to change. 5/09 ver. 2.

©2009 NEC Display Solutions of America, Inc. All rights reserved.



Québec Montréal
Tél. : (418) 681-2470 Tél. : (514) 871-1994

www.presence.qc.ca

NEC