

# NP Value Series

## NP110, NP115 and NP215 digital projectors

Affordable with essential features, NP mobile projectors are designed to provide brilliant display of information in meeting and conference rooms.

### ESSENTIAL FEATURES FOR EASE OF USE

- Bright images can be easily viewed in most applications
- High contrast images (2000:1) from the latest Texas Instruments DLP® engine featuring BrilliantColor™ technology with improved color accuracy
- Color-coded and clearly labeled input panel provides intuitive setup
- Intuitive remote control provides one-touch source changes and complete menu control
- Integrated RJ45 connection for quick connection to the LAN (10/100 base-T capability; NP215 only)
- Remote diagnostics enable the user to monitor and make adjustments to the projector remotely

### DESIGNED WITH THE ENVIRONMENT IN MIND

- Extended lamp life with ECO Mode™ technology increases lamp life up to 5000 hours, while lowering power consumption
- Power management enables projector to automatically turn off when an incoming signal is not detected from any of the inputs
- Auto Power On via the RGB (15-pin) input connector when a signal is detected from a computer
- Carbon savings meter calculates the positive effects of operating the projector in ECO Mode, which is encouraged by an optional message at startup. A green ECO Mode button on the remote control makes the switch easy.
- Quick start (3 to 4 seconds) lets you begin presenting in seconds while quick shutdown (immediate power off with no cooling required after shutdown) ensures efficient energy usage



### Series Features and Benefits


- LONG LAMP LIFE
- EASY TO USE
- MOBILE DESIGN
- HIGH BRIGHTNESS
- FLEXIBLE INPUT PANEL
- BUILT-IN SPEAKER
- MONITOR OUTPUT
- REMOTE CONTROL

### VERSATILE FEATURES AND POWERFUL PERFORMANCE

- Powerful 7-watt speaker provides volume needed for large rooms
- Built-in wall color correction presets provide for adaptive color tone correction to display properly on non-white surfaces
- Plug and Play setup and operation optimizes images displayed from computers and video sources
- Native SVGA and XGA resolution projectors automatically sync with higher-resolution computers
- Flexible input panel connects with computer, composite video, S-Video and component video (using optional 15-pin adapter cable)
- Compact size and lightweight design simplifies transport of projector
- 10-step image magnification with location control allows you to zoom in on key information
- AV mute and video image freeze allows you to control the presentation and focus audience attention
- Aspect ratio control provides standard and widescreen display
- Fine tune the image with color temperature, brightness and contrast adjustments



When combined with active shutter glasses (NP01GL), the 3D Ready NP115 and NP215 use DLP Link™ technology, developed by Texas Instruments, to create 3-D images

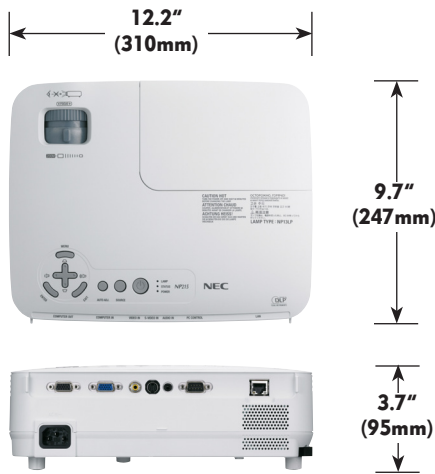

Note: Image shown is of NP215

## UNIQUE FEATURES

**BrilliantColor™ technology** advanced video processing from Texas Instruments delivers more vibrant and realistic colors and blacks richer with detail.

**ECO Mode technology** extends lamp life, lowers audible noise and reduces total cost of ownership.

**Built-in closed captioning** enables decoding and display of text information from a video

**Kensington lock slot** enables security cable to be attached to projector.

**Filter-free design** eliminates the hassle and time spent monitoring and/or changing filters

**10-step image magnification** with location control

## IN THE BOX

Remote control, batteries, RGB cable, power cord, user's manual, product registration card

## WARRANTY

Registered owners receive a 2-year parts and labor warranty including the first year of InstaCare. The lamp is covered for one year or 500 hours - whichever comes first. InstaCare provides the original owner one year of either limited 3-business-day repair/return or next-business-day exchange.



## Specifications for NP110/NP115/NP215

<b>OPTICAL</b>	
Display Technology	0.55" DLP by Texas Instruments with BrilliantColor
Resolution	NP110/NP115: SVGA 800 x 600 NP215: XGA 1024 x 768
Native	UXGA 1600 x 1200
Maximum Light Output (lumens)	NP110: 2200 normal NP115/NP215: 2500 normal
Contrast Ratio (up to)	2000:1
Lamp Type	180W AC
Lamp Life (up to)	3500 hours normal / 5000 hours eco
Screen Size (diagonal)	33 to 300 in. / 838 to 7620mm
Throw Ratio	1.95 to 2.15
Projection Distance	3.9 to 39.4 ft. / 1.2 to 12m
Projection Angle	14° wide / 12.7° tele
Lens	
Zoom	1 - 1.1
Focus	Manual
F-number	F = 2.41 to 2.55, f = 21.83 to 24mm
Keystone Correction	+/- 40 degrees
<b>SIGNAL COMPATIBILITY/CONNECTIVITY</b>	
Scan Rate	Horizontal 15 - 100 kHz / Vertical 50 - 120 Hz
Supported Video Standards	NTSC, NTSC4.43, PAL-M, N, B, D, G H, I, SECAM
SD/HD Video Signal Compatibility	480i, 576i, 480p, 576p, 720p, 1080i
PC Signal Compatibility	VGA, SVGA, XGA, WXGA, WXGA+, SXGA, SXGA+, UXGA
Macintosh Compatibility	Yes
Input/Output Terminals	
RGB (analog)	15-pin, component video using ADP-CV1E adapter
Video 1	S-Video
Video 2	RCA
Audio	Mini stereo
External Control	7W speaker
Sync Compatibility	RS-232, IR, Wired LAN (NP215 only)
Monitor Out	Separate Sync / Composite Sync / Sync on G
	Yes
<b>ELECTRICAL</b>	
Power Requirements	100 - 240V AC, 50/60 Hz
Input Current	2.6A
Power Consumption (Normal Mode/ECO Mode/Standby/Standby [Power Saving])	242W / 217W / 4W / 0.49W
<b>MECHANICAL</b>	
Installation Orientation	Table/Front, Table/Rear, Ceiling/Front, Ceiling/Rear
Dimensions (W x H x D)	12.2 x 3.7 x 9.7 in. / 310 x 95 x 247mm
Net Weight	5.5 lbs. / 2.5 kg
Fan Noise	34 dB
Regulations	USA UL 1950 FCC Class B, Canada CSA 950 (C-UL), NOM
<b>ENVIRONMENTAL</b>	
Operational Temperature	41° - 104°F / 5° - 40°C
Humidity	20-80% non-condensing
Storage	-4° - 122°F / -20° - 50°C
<b>ACCESSORIES</b>	
NP13LP	Replacement lamp
NP01UCM	Universal ceiling mount
NP215CASE	Projector carrying case
NP01GL	Active shutter 3-D glasses
RMT-PJ30	Replacement remote control
LEATHERROLLER	Padded leather briefcase with wheels, extension handle and compartments for laptop and projector
SCP100	Lightweight adjustable suspended ceiling plate for use with NEC ceiling mounts
ADP-CV1E	Component video adapter converts component video to D-sub 15-pin
PWRCRD-PJPX	Power cable
RGBCBL-PJPX	RGB cable
NECEW1-MP	Extends term of parts and labor warranty to 3 years
NECEW2-MP	Extends term of parts and labor warranty to 4 years
ADVEXON1-MP	Extends term of InstaCare service program to 2 years
ADVEXON2-MP	Extends term of InstaCare service program to 3 years

ECO Mode and Total Trade are trademarks of NEC Display Solutions. BrilliantColor is a trademark, and DLP and the DLP logo are registered trademarks of Texas Instruments. All other brand or product names are trademarks or registered trademarks of their respective holders. Product specifications subject to change. 6/10 ver. 6.

©2010 NEC Display Solutions of America, Inc. All rights reserved.

**PRÉSENCE**

Québec Montréal  
Tél. : (418) 681-2470 Tél. : (514) 871-1994  
www.presence.qc.ca

NEC