


# 3M™ Digital Wall Display 9000PD Plus

When you need the very best tools to communicate your important goals and strategies, the 3M™ Digital Wall Display Plus delivers results. This all-in-one projection display system integrates crisp, clear computer and video images, an erasable screen, and an amazing room-filling sound system.



3M™ Digital Wall Display 9000PD Plus

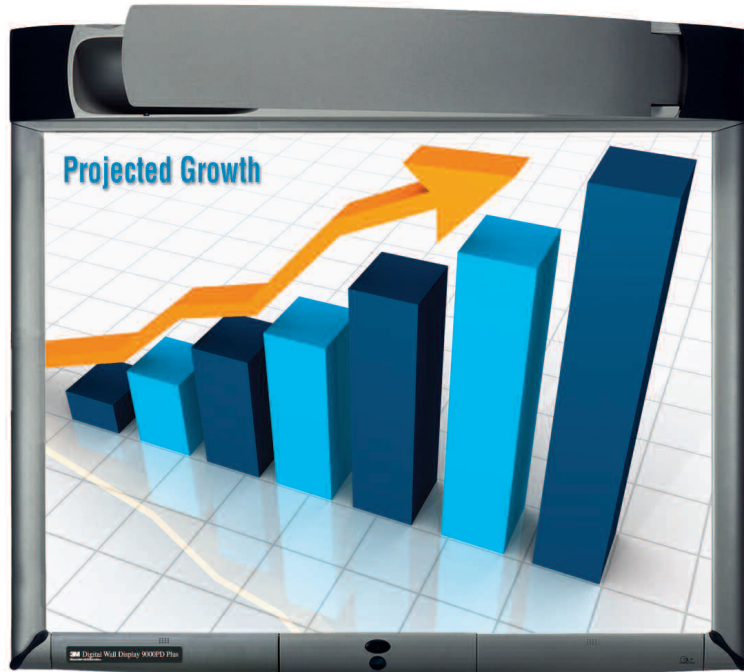

## Versatility and Performance

Ease of use with one step on/off button which opens the projection arm, and then aligns and focuses the image. When finished, arm closes providing a sleek flat panel appearance.

True XGA Projector (1024 x 768 resolution) and write-on dry erase screen meet all your communication needs.

**9000PD Plus** 78-9236-6899-6  
60" diagonal screen  
UPC 0 00 51125 63047 4

## Features

- 60" diagonal screen size
- Vikuiti™ Super Close Projection by 3M virtually eliminates distracting shadows and reduces glare
- Hollywood Quality Video (HQV™) delivers leading edge video and even improves poor quality video from VCR's and video conferencing systems
- Built in 40 Watt (total) stereo speaker system provides quality sound at a level everyone can hear
- Full computer and video connectivity displays content from almost any source including document cameras, DVD players or video conferencing systems
- Reliable DLP™ Technology
- Mounts to the wall or works with the optional mobile cart to turn the most architecturally challenging environment into a high powered solutions center

**1-800-328-1371**  
[www.3m.com/meetings](http://www.3m.com/meetings)



## System Specifications

Dimensions:	53.2" W x 47.6" H x 7.0" D (1350 mm x 1280 mm x 179 mm)
Wall-to-screen	7.05" (18 cm) including mounting bracket
Weight:	Approx. 85 lbs. (39 kg.)
Speakers:	Built-in 2 x 20w
Mouse Emulation:	USB
Video Compatibility:	NTSC, PAL, SECAM, 720P
Computer Compatibility:	VGA (640 x 480) to SXGA (1280 x 1024), (1600 x 1200 DVI-D)
Horizontal Sync Frequency:	15 - 82 kHz
Vertical Sync Frequency:	50 - 85 kHz
Keystone Adjustment:	Horizontal $\pm$ 30°; Vertical $\pm$ 40°
Power Requirements:	Input 100-240V; 50Hz/60Hz, 3 wire grounded, 355 W max
Regulatory approvals:	UL, CE, FCC Class A, CISPR Class A
Compliance:	WEEE, RoHS
Environmental:	
Operating	10 - +35°C, 10 - 85% RH, without condensation
Storage	- 10 - 60°C, 10 - 85% RH, without condensation
Altitude	0 - 6000 feet above sea level

## Optical

Display Screen:	60" diagonal, easy erase screen surface
Resolution:	XGA (1024 x 768); maximum SXGA (1280 x 1024)
Viewing Angle:	170° horizontal; 170° vertical
Colors:	16.7 million true colors (24 bit)
Contrast Ratio:	300:1 typical; 200:1 minimum
Aspect Ratio:	Native 4:3, 16:9 supported
Throw Ratio:	Distance/Diagonal: 755 mm/ 1524 mm = .5
Imager:	Single 0.7", DLP™ Imager
Focus:	Automatic
Lens Type:	Vikuti™ Super Close Projection by 3M
Lamp Type:	250W
Lamp Life:	1600 hours (avg)

## Connections

### Computer

1 - VGA
1 - DVI - I (Analog/Digital)
1 - USB B
1 - Ethernet
1 - RS232C

### Audio - In

2 - 3.5 mm Stereo Mini Jack
2 - RCA

### Video

1 - Composite
1 - S-Video
1 - Component

### Audio - Out

1 - RCA Loop through (with delay adjustment)
--



## Included Accessories

- VGA cable
- Macintosh™ to VGA adapter
- VGA to DVI adapter
- Component cable
- Composite (RCA) cable
- Remote Control
- S-video cable
- USB cable
- 3.5mm Stereo Mini cable
- RS232 cable
- Power cords (US, UK, Europe)
- Wall Mounting Bracket

## Optional Accessories

- Adjustable Height Mobile Cart 78-6969-9752-3
- Mobile Glass Tray 78-6969-9783-8
- Accessory Tray (left) 78-6969-9754-9
- Accessory Tray (right) 78-6969-9754-1
- 1-Year Extended Warranty (includes 1 free lamp) 78-6969-9596-4
- Installation Service 78-6969-3269-0
- Replacement Lamp 78-6969-9882-8

## Important Notice

All statements, technical information, and recommendations related to 3M's products are on information believed to be reliable, but the accuracy or completeness is not guaranteed. Before using this product, you must evaluate it and determine if it is suitable for your intended application. You assume all risks and liability associated with such use. Any statements related to the product which are not contained in 3M's current publication, or any contrary statements contained on your purchase order shall have no force or effect unless expressly agreed upon, in writing, by an authorized officer of 3M.

©3M 2007. All Rights Reserved. V042307

78-6970-8601-1

## 3M Visual Systems

Building A 147-5N-01  
6801 River Place Blvd.  
Austin, TX 78726-9000

## 3M Canada

P.O. Box 5757  
London,  
Ontario, Canada  
N6A 4T1

## 3M Mexico, S.A. de C.V.

Apartado Postal 14-139  
Mexico, D.F. 07070  
Mexico

## Warranty; Limited Remedy; Limited Liability

This product will be free from defects in material and manufacture for a period of one year from the date of purchase. 3M MAKES NO OTHER WARRANTIES or CONDITIONS INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OF CONDITION OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. If this product is defective within the warranty period stated above, your exclusive remedy shall be, at 3M's option, to replace or repair the 3M product or refund the purchase price of the 3M product. Except where prohibited by law, 3M will not be liable for any indirect, special, incidental or consequential loss or damage arising from this 3M product, regardless of the legal theory asserted. Specifications subject to change without notice.

3M, the 3M logo and the Vikuti logo are trademarks of 3M Company. Used under license in Canada. All other trade names referenced are the service marks, trademarks, or registered trademarks of their respective companies.